

09/29/00



JCS22 U.S. PRO

10-02-00

A

PATENT APPLICATION
Attorney's Do. No. 8371-98

JCS22 U.S. PRO

09/29/00



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

EXPRESS MAIL

MAILING LABEL NO. EL432977195US

DATE OF DEPOSIT: SEPTEMBER 29, 2000

I HEREBY CERTIFY THAT THIS PAPER AND ENCLOSURES AND/OR FEE ARE BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO: BOX PATENT APPLICATION, ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON D.C. 20231.

(SENDER'S PRINTED NAME)

(SIGNATURE)

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Enclosed for filing is a patent application under 37 CFR 1.53(b) of:

Inventor [or Application Identifier]: Louis Joseph Kerofsky

For: VIDEO CONTRAST ENHANCEMENT THROUGH PARTIAL HISTOGRAM EQUALIZATION

[If continuing application] This application is a ☐ continuation, ☐ divisional, ☐ continuation-in-part of prior application Serial No. _____, filed _____.

Enclosures:

- ☒ Specification (pages 1-17); claims (pages 18-24); abstract (page 25)
- ☒ 11 sheet(s) of drawings
- ☒ Declaration or Combined Declaration and Power of Attorney
 - ☒ Newly executed (original or copy)
 - ☐ Copy from a prior application (37 CFR 1.63(d))
 - ☐ Incorporation by Reference--The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
 - ☐ Deletion of Inventors (signed statement attached deleting inventor(s) named in the prior application (37 CFR 1.63(d)(2) and 1.33(b))

- ☐ Power of Attorney
☒ Assignment with cover sheet
☐ Certified copy of priority document:
☐ Information Disclosure Statement with Form PTO 1449
☐ Copies of references listed on attached Form PTO-1449
☐ Preliminary Amendment
☐ Change of Address
☒ Return Postcard


CLAIMS AS FILED				
For	Number Filed	Number Extra	Rate	Basic Fee
				\$690.00
Total Claims	35-20	15	x \$ 18 =	270.00
Independent Claims	4-3	1	x \$ 78 =	78.00
Multiple Dependent Claim Fee			x \$260 =	0.00
TOTAL FILING FEE				\$1,038

- ☐ Cancel in this divisional application original claims _____ of the prior application Serial No. _____ before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
☒ A check in the amount of \$1,078 to cover ☒ filing fee and ☒ assignment recordal fee (\$40) is enclosed.
☒ Any deficiency or overpayment should be charged or credited to deposit account number 13-1703. A duplicate copy of this sheet is enclosed.

Customer No. 20575

Respectfully submitted,

MARGER JOHNSON & McCOLLOM, P.C.



 James E. Harris
 Reg. No. 40,013

MARGER JOHNSON & McCOLLOM, P.C.
 1030 SW MORRISON STREET
 PORTLAND, OREGON 97205
 (503) 222-3613

VIDEO CONTRAST ENHANCEMENT THROUGH PARTIAL HISTOGRAM EQUALIZATION

FIELD OF THE INVENTION

5 This present invention relates to video contrast enhancement, and more particularly to a method and apparatus for enhancing video contrast via partial histogram equalization.

BACKGROUND OF THE INVENTION

10 A digital image represents a visual scene as an array of pixels. Each pixel stores the image intensity level for a specific point in the visual scene. For example, in a black-and-white digital image, each pixel may contain an 8-bit value that expresses a luminance level as a number between 0 and 255, with 0 representing black and 255 representing white. In a color digital image, each pixel may have multiple components or color planes, each component representing the intensity level for a "color" (e.g., RGB (Red-Green-Blue) or CMY (Cyan-Magenta-Yellow) color planes) or a luminance/chrominance value.

15 Many digital images are captured in such a way that the dynamic range available in the pixel format is underutilized. For instance, in a given 8-bit image, most of the image intensity information may cluster in a small sub-range of the available 0-to-255 range. This results in a displayable image with many image features that cannot be readily discerned by a human viewer, as the contrast sensitivity function (CSF) of the human visual system cannot
20 resolve such small differences in image intensity level.

 Fine-contrast features in a digital image can be made more discernable by application of a contrast-enhancement algorithm known as histogram equalization (a histogram indicates the relative occurrence of each possible pixel value in a particular digital image—the magnitude of each *bin* in the histogram represents the frequency of occurrence of a
25 corresponding pixel value). A short description of histogram equalization (HE) follows.

Figure 1 shows a hypothetical histogram $H(x)$ for an input image (actual histograms are rarely smooth functions as shown, and are often multimodal). Although the dynamic range of the pixel format allows for intensity levels x between 0 and $L-1$, $H(x)$ indicates that the hypothetical image only occupies values between x_{MIN} and x_{MAX} .

Histogram equalization attempts to redistribute the various image intensity levels to new levels so that the histogram $E(y)$ of the output image better approximates a uniform distribution over the entire range 0 to $L-1$. A remapping function $y = F(x)$ is calculated such that

$$E(y) = E(F(x)) = H(F^{-1}(y))$$

approximates such a uniform distribution. Although $E(y)$ in Figure 1 is shown as perfectly uniform, it is noted that with quantized data as exists in histogram bins, HE will usually not result in L bins with an equal number of pixels in each. Nevertheless, the HE algorithm distributes the quantized data in as uniform of a manner as is possible (see Figure 14 for actual examples).

With a near-symmetric distribution such as $H(x)$, the mean of the distribution x_M will map approximately to the level $L/2$ in $E(y)$. When the distribution is not symmetric, the specific location that x_M will map to depends on how the histogram is skewed. These characteristics of HE can cause problems when HE is applied to a video sequence—although each output frame may have excellent contrast, the mean value is not preserved. Thus a histogram-equalized video sequence may have undesirable image flicker artifacts. Also, since the mean may change significantly, scenes which are intended to be dark (or bright) may no longer appear so.

One researcher has proposed a different HE scheme to combat the problems inherent in applying classical histogram equalization to a video sequence. “Contrast Enhancement Using Brightness Preserving Bi-Histogram Equalization”, Y.-T. Kim, *IEEE Transactions on*

Consumer Electronics, Vol. 43, No. 1, Feb. 1997; *see also* Kim & Cho, "Image Enhancing Method Using Mean-Separate Histogram Equalization and a Circuit Therefor", U.S. Patent No. 5,963,665, Oct. 5, 1999.

Referring to Figure 2, the intended operation of Kim's method is illustrated. Kim calculates the mean intensity level x_M for the input image. Kim then ensures that x_M maps to itself in the output image by dividing the image into two groups of pixels, those above x_M and those below this value. Each group is then histogram-equalized separately, i.e., the lower group of pixels is equalized over the range 0 to x_M , and the upper group of pixels is equalized over the range x_M to $L-1$. This results in an output histogram approximately represented by $B(y)$ in Figure 2. Kim notes that for a symmetric distribution $H(x)$, the mean output intensity achieved with his mapping is $(x_M + L/2)/2$, i.e., the mean shifts halfway towards the middle intensity, instead of all the way to the middle intensity like in classical HE. Kim claims that this results in less brightness shifting over an image sequence. The Kim approach will be referred to herein as BBHE (Brightness-preserving Bi-Histogram Equalization).

It is recognized herein that BBHE can still produce undesirable artifacts when applied to a video sequence. One problem with BBHE is that many different image distributions can have the same mean. Particularly when these distributions are multi-modal, some regions of the image may experience drastic shifts in intensity even though the mean intensity is preserved. Another problem is that the mean statistic is extremely sensitive to outliers, i.e., a relatively few pixels with intensities located far from the mean can have a profound influence on mean intensity. Thus when the histogram is not symmetric about the image mean, large shifts in mean brightness can still occur, and substantial brightness shifts can still occur for some ranges of pixel values.

These effects are illustrated by the simplified bimodal distributions of Figures 3 and 4.

In Figure 3, the input histogram is divided into two modes; mode 20 contains 25% of the

pixels, and is uniformly distributed over a range 0 to $0.2L$. Mode 22 contains the other 75% of the pixels, and is uniformly distributed over a range $0.25L$ to $0.35L$. The input image mean $x_M = 0.25L$. With this input, BBHE produces a result equivalent to that produced with mapping function 24, and the output histogram is (somewhat coincidentally) a uniform distribution 26. Note that the mean level has shifted all the way up to $L/2$, i.e., it has doubled. And mode 22, which contains 75% of the pixels, has been spread by a factor of 7.5.

Now compare this result with Figure 4, which has the same mean $x_M = 0.25L$. In Figure 4, the input histogram is also divided into two modes; mode 28 contains 5/6ths of the pixels, and is uniformly distributed over a range $0.05L$ to $0.2L$. Mode 30 contains the remaining 1/6 of the pixels, and is uniformly distributed over a range $0.75L$ to L . When BBHE is applied to this input, distribution 34 results, and the mean level has shifted down to $\sim 0.208L$. Mode 30, which represented very bright pixels in the scene, has been shifted such that some of its pixels now appear very dark. These simple examples show that with BBHE, the input scene, as well as the average brightness, can at the BBHE output change significantly and in many different ways, even though the input mean value is stabilized.

SUMMARY OF THE INVENTION

The present disclosure proposes a novel contrast enhancement approach that is particularly applicable to video sequences. This approach is based on several underlying observations (although a particular embodiment of the invention may not utilize each of these principles). First, it is assumed that the video was captured at the desired mean intensity and that the primary objects in the scene are generally visible. If this assumption is not correct, a scene-constant brightness adjustment is an appropriate way to deal with this situation—thus, frame-adaptive video contrast enhancement is typically not the best place to be performing large intensity shifts on large numbers of pixels. Second, the mean intensity is generally not a preferred metric for determining how an image should be equalized, as is evident from the

discussion in the section above. From these principles, it is proposed that flicker artifacts can be controlled by limiting equalization to one or two subranges of pixel intensities, preferably at the darkest and lightest subranges of histogram levels, and by limiting the extent to which these pixel intensities can be remapped to include, respectively, the darkest and lightest

5 histogram subranges. Although this approach may not provide the best contrast enhancement possible for each frame considered individually, it can provide good contrast enhancement without noticeable temporal intensity artifacts or lighting distortion.

In one aspect of the present invention, a method of video contrast enhancement is disclosed. A first pixel level threshold is set for an input video frame in a video sequence. When a given input-video-frame pixel's level is below the pixel level threshold, that pixel is remapped according to an adaptive contrast-enhancing function. When the given input-video-frame pixel's level is above the pixel level threshold, that pixel is instead remapped according to a scene-stable mapping function.

Preferably, the threshold is either fixed during the scene, or is based on a percentage of pixels, e.g., the histogram bin below which x% of the pixels fall. Also preferably, the adaptive contrast function maps an input histogram for values below this threshold to a new target histogram.

Alternately, the method can be applied to high-intensity levels instead of low-intensity levels, i.e., the method can be reversed about the threshold. And the method can be applied
20 to enhance contrast below a lower threshold and above an upper threshold, while applying the scene-stable mapping function to pixels having intensities lying between the two thresholds.

Although the method is straightforward enough to be implemented in hardware, software implementations are also envisioned. Therefore, the disclosed methods can also be embodied in an apparatus comprising a computer-readable medium containing computer
25 instructions that, when executed, cause a processor or multiple communicating processors to

perform a method for video contrast enhancement.

In another aspect of the invention, a video contrast enhancer is disclosed. The contrast enhancer comprises a contrast-enhancing function generator capable of accepting a target histogram specification and a set of histogram bins derived from one or more frames of a video sequence. The set of histogram bins represent a histogram at least for pixel levels below a selected pixel level threshold. The function generator is capable of generating a remapping function for input pixel levels below the threshold based on the target histogram specification and the set of histogram bins. The contrast enhancer further comprises a scene-stable mapper to control the remapping function for input pixel levels above the threshold.

In yet another aspect of the invention, a digital video device is disclosed. The device comprises a partial-histogram contrast enhancer to accept a digital video frame sequence and remap the pixel levels in each frame. The remapping conforms a histogram derived from the frame sequence to a new histogram specification for pixel levels below a first pixel level threshold. The device also has means for setting the first pixel level threshold, and means for enabling the partial-histogram contrast enhancer. In other respects, the digital video device can be constructed as a conventional digital video device, e.g., a digital video camera, an analog-to-digital video transfer device, a digital video editing device, a digital video compressor, a digital video decompressor, a digital video receiver, a digital video playback device, or a digital video display device. The histograms used by the contrast enhancer can be calculated within the device, or supplied, e.g., as part of the digital video frame sequence.

BRIEF DESCRIPTION OF THE DRAWING

The invention may be best understood by reading the disclosure with reference to the drawing, wherein:

Figures 1 and 2 illustrate prior art approaches to contrast enhancement;

Figures 3 and 4 illustrate mapping characteristics of the prior art BBHE approach;

Figures 5 and 6 illustrate contrast-enhancement mapping according to two embodiments of the invention;

Figure 7 shows a block diagram for a video contrast enhancer according to an embodiment of the invention;

5 Figure 8 depicts a block diagram for one embodiment of a target histogram calculator useful with the video contrast enhancer of Figure 7;

Figure 9 shows an alternate video contrast enhancer embodiment employing a scene change detector;

Figure 10 contains a block diagram for a histogram averager useful with various embodiments of the invention;

Figures 11, 12, and 13 each compare remapping functions obtained at three frames of a video sequence—Figure 11 for the prior art BBHE approach, and Figures 12 and 13 for two embodiments of the present invention;

Figure 14 shows frame histograms corresponding to the remapping functions of Figures 11, 12, and 13; and

Figure 15 shows the deployment of a video contrast enhancer according to the present invention within a digital video device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Several terms have been assigned particular meanings within the context of this disclosure. As used herein, the terms “above” and “below” a threshold are used with the recognition that, with integer comparisons, something is often defined to be “above” (or alternately, “below”) a threshold if it equals that threshold. A “contrast-enhancing function” redistributes a set of pixel intensities in a non-linear manner that increases the average contrast between neighboring intensities. A “function” can be a closed form equation, but a discrete function can also be implemented using, e.g., a lookup table. An “adaptive” function

changes as scene content changes, although it need not change at every frame, and the response to scene content changes can be delayed or filtered. On the other hand, a “scene-stable” function remains substantially constant for the duration of a video scene (or longer); if such a function does change substantially, it does so at scene transitions or very gradually.

“Histogram specification” is a process of mapping one histogram to generally fit the shape of a target histogram—“histogram equalization” is a special case of histogram specification, where the target histogram is a uniform distribution. The bins of a histogram need not be expressed in any particular units, although percentages and raw number of pixels are common units. Likewise, a histogram can be either discrete or cumulative. The bins need not map 1:1 to pixel intensities either; for example, a histogram bin may map to only the top six bits of an eight-bit intensity.

A first embodiment will now be described with reference to Figure 5. Figure 5 shows the same input histogram $H(x)$ as used in the illustrations of Figures 1 and 2. A threshold T is fixed at a selected input value, e.g., $L/4$. The combined function $y = P(x)$ defines the desired mapping from $H(x)$ to $O(y)$. Below T , $P(x)$ comprises a contrast-enhancing function such as HE (illustrated) applied over the same range of output pixels. Above T , $P(x) = x$, hence output histogram $O(y) = H(x)$ for $x > T$.

This embodiment has several generally advantageous features. First, note that intensity remapping is limited to a range at the tail of the overall intensity range. This prevents intended lighting levels from being distorted unnaturally, e.g., light areas appearing dark and vice-versa. Second, the range is based on a stable statistic that is not scene-dependent. This means that even if the histogram distribution changes dramatically over a progression of frames, the enhanced range remains stable.

A second possible embodiment is depicted in Figure 6. Two thresholds, T_L and T_U , are based on a percentage of histogram pixels. For instance, T_L can be set so that 10% of the

pixels fall in a lower tail, and T_U can be set so that 10% of the pixels fall in an upper tail. A contrast-enhancing function is applied to each tail, while the middle 80% of the pixels are linearly mapped.

This embodiment preserves the majority of pixel intensities as-input, again relegating changes to the tails of $H(x)$. Figures 5 and 6 can be combined in several ways—for instance, two fixed thresholds can be used, or a percentage threshold can be used on one tail only. A percentage threshold can also be used, but clamped to not exceed a fixed threshold. For instance, if $T_{0.9}$ represents the histogram bin x below which 90% of the pixels lie, and T_{UF} represents a minimum value for the upper threshold T_U (e.g., $3L/4$), the threshold can be set such that

$$T_U = \max(T_{0.9}, T_{UF}).$$

Embodiments such as those described above can be implemented with a video frame processing device such as device 40 of Figure 7. Device 40 is depicted in block diagram form. An $N \times M$ rectangular input frame $I(i,j,k)$ is supplied to frame buffer 50 and frame histogram calculator 60, where i designates a row between 0 and $N-1$, j designates a column between 0 and $M-1$, and k designates a frame-identifying sequence number. Frame buffer 50 holds the frame until a remapping function $P(x,k)$ is ready for that frame.

Frame histogram calculator 60 calculates a histogram $H(x,k)$ for that frame. For instance, calculator 60 can perform the equivalent of the following operations upon receiving a frame k :

```
for (i = 0; i <= MaxLevel; i++)
    Hist[i] = 0;

for (i = 0; i < N; i++)
{
    for (j = 0; j < M; j++)
        ++Hist[I[i][j]];
}
```

Calculator 60 supplies histogram $H(x,k)$ to target histogram calculator 70 and function

generator 80. Target histogram calculator 70 also receives a level threshold T_L and a histogram specification for the portion of $H(x,k)$ to be contrast-enhanced. Calculator 70 calculates a target histogram $T(x,k)$ from these values. For instance, calculator 70 can perform the equivalent of the following operations, upon receiving a frame k , in order to

5 implement a uniform histogram specification:

```

for (i = 0; i < T; i++)
    SumHist += Hist[i];

SumHist /= T;
10 for (i = 0; i < T; i++)
    Target[i] = SumHist;

for ( ; i <= MaxLevel; i++ )
    Target[i] = Hist[i];
5
```

These operations count the number of pixels that have an intensity less than T_L and divide this count by the number of bins that exist below the threshold. This figure represents a uniform number of pixels, that, when distributed in each bin below the threshold, equals (approximately for integer arithmetic) the number of pixels that are to be equalized. For bin values above the threshold, the frame histogram bin value is copied to the target histogram bin, indicating that remapping is generally not desired for these pixels.

Function generator 80 calculates a remapping function $P(x,k)$ based on $H(x,k)$ and $T(x,k)$. For instance, the following calculations produce a lookup table Remap[] that
25 expresses a remapping function that maps $H(x,k)$ approximately to $T(x,k)$:

```

SumTarget = Target[0];
SumHist = 0;
for (i = j = 0; i <= MaxLevel; i++)
30 {
    SumHist += Hist[i];
    while ((SumHist > SumTarget) && (j < MaxLevel))
        SumTarget += Target[++j];
    Remap[i] = j;
35 }

```

Pixel level remapper 90 applies the remapping function $P(x,k)$ to input frame $I(i,j,k)$ to

produce a contrast-enhanced frame $C(i,j,k)$. For instance, when a lookup table is used to perform remapping, the following sequence of operations can be used to remap the input image:

```

5  for (i = 0; i < N; i++)
    {
        for (j = 0; j < M; j++)
            C[i][j] = Remap[I[i][j]];
    }

```

In Figure 7, actual histograms generated during processing of a video frame are shown. Also shown is the output histogram $O(x,k)$ measured on the contrast-enhanced frame $C(i,j,k)$. Although the corresponding original frame $I(i,j,k)$ and contrast-enhanced frame $C(i,j,k)$ are also depicted in Figure 7, it is not critical to an understanding of the invention that one discern from the figure any specific details about the frame itself.

Figure 8 shows a block diagram for a target histogram calculator 70 as described above. Conceptually, histogram “splitter” 72 supplies the below- T_L portion of the input histogram to bin averager 74 and the above- T_L portion of the input histogram to scene-stable mapper 76. In an actual implementation, splitting may involve no more than supplying threshold T_L and the complete histogram $H(x,k)$ to both bin averager 74 and scene-stable mapper 76. These blocks can use threshold T_L to access the portions of the input histogram needed for their operation.

Note that histogram splitter 72 can perform an additional function if the input threshold parameter is a percentage instead of an absolute level—splitter 72 can determine the absolute level from the percentage. For example, splitter 72 can perform the following search, where $T_{percent}$ is the percentage threshold.

```

25  PixelThresh = Tpercent * ( N * M );
    NumPixels = 0;
    for (T = 0; PixelThresh > NumPixels; T++)
        NumPixels += Hist[T];

```

Bin averager 74 produces an average pixels/bin figure N_P to scene-stable mapper 76. Bin averager 74 can compute N_P by summing the bin values for bins below T_L , and then

dividing by the number of bins summed.

Scene-stable mapper 76 produces the target histogram $T(x,k)$ in two steps. First, mapper 76 stores the value N_p in each target histogram bin corresponding to a pixel intensity lower than T_L . For the remaining bins, mapper 76 stores $H(x,k)$ in $T(x,k)$.

In some embodiments, it may be preferable to have a temporal response characteristic that is slower than the single-frame contrast enhancement shown in Figure 7. It may also be preferable to vary the temporal response characteristic depending on how quickly or slowly the scene is changing. Figure 9 illustrates these concepts.

Figure 9 shows two additional blocks 100 and 110 that do not exist in Figure 7. Block 100 is a temporal histogram filter. Block 110 is a scene change detector. Each block can be used independent of the other, or they can operate together as shown.

Temporal histogram filter 100 supplies a weighted average of past frame histograms, instead of an instantaneous frame histogram, to target histogram calculator 70 and function generator 80. Since the weighted average should be a smoother function and change slower than the instantaneous histogram, the addition of filter 100 adds additional stability to the adaptive contrast-enhancing function.

Figure 10 shows one possible configuration for temporal histogram filter 100. Frame histogram calculator 60 writes the instantaneous frame histogram for frame k into buffer 102. Buffer 106 contains the averaged histogram from frame $k-1$. Exponential bin filter 104 updates the contents of each bin of buffer 106, using a supplied time constant α , according to the following operations:

```
for (i = 0; i <= MaxLevel; i++)
    AvgHist[i] = AvgHist[i] +  $\alpha$  * (Hist[i] - AvgHist[i]);
```

Note that α need not be a constant. For instance, at detected scene changes, α can be set equal to 1.0 for one or two frames, in effect causing the instantaneous histogram to be

copied into the average histogram buffer 106. In successive frames, α can be returned gradually (or in one step) to a much lower steady-state value.

Returning to Figure 9, scene change detector 110 can be employed to detect how much the scene changes between successive frames. Although sophisticated scene analysis tools could be employed in detector 110, the kind of scene changes that a contrast enhancer cares about are generally not motion, but wholesale changes in the intensity distribution of the pixels in successive frames. Viewed from this standpoint, comparisons of successive frame histograms can generally be used in such a detector. For instance, scene change detector 110 can calculate a smoothed version of the current frame histogram (e.g., by mean-filtering across the bins or down-sampling). The smoothed versions of the current frame histogram and the preceding frame histogram can then be differenced. Statistics gathered from the difference histogram, such as average difference/bin, can then be used to make a scene change decision. When the differences indicate that the intensity distribution has changed substantially, the signal SC can be asserted.

As discussed above, the scene change signal SC can be used by temporal histogram filter 100 to adjust α . Target histogram calculator 70 can also use SC if such is desired. For instance, if changes to the scene-stable mapping function are to be made, such changes can be constrained to take place when SC is asserted.

To illustrate the performance of the present invention, a 256-gray-level sample video sequence was processed via four different approaches. The first approach was classic histogram equalization. The second approach followed the prior art BBHE algorithm. The third approach was frame-by-frame contrast enhancement according to an embodiment of the invention, with a threshold set at 50% of the input histogram. A shorthand name for this embodiment is PHE-P50 (Partial Histogram Equalization, 50% of pixels threshold). The fourth approach was like the third, but with the threshold fixed at a gray level of 64. A

shorthand name for this embodiment is PHE-L64 (PHE, Level 64 threshold).

Figures 11, 12, and 13 correspond respectively to BBHE, PHE-P50, and PHE-L64. Each figure contains three plots of remapping curves—these correspond to the remapping curves applied respectively at frame 89, frame 109, and frame 176 of the sample video sequence. Figure 11 shows that with BBHE, the mapping function applied to the video sequence fluctuates considerably. For instance, at frame 89, an input gray level of 50 maps to an output gray level of about 80; a second later, this same gray level maps to an output gray level of about 150. The brightness fluctuation implied by the remapping curves of Figure 11 is clearly visible in the processed video.

Figures 12 and 13 show that for the same three-frame comparison, both PHE embodiments produced only small temporal differences in the remapping function.

Figure 14 compares input histograms to output histograms for frames 89, 109, and 176, for each of the four tested methods. For both PHE methods, it can be appreciated that the output histograms generally resemble the input histograms, but with better utilization of the lowest range of intensities.

The present invention is useful in many different types of digital video devices. Figure 15 shows a general block diagram of a digital video device 200, including the elements necessary to implement and control a partial-histogram contrast enhancer 210. To represent the image sequence to be contrast-enhanced, device 200 supplies a digital input frame sequence and/or a corresponding frame histogram sequence to PHE 210. The output of PHE 210 can be a contrast-enhanced image sequence and/or a LUT that can be used for such contrast enhancement. Some examples of the types of devices that can be implemented according to Figure 15 include digital video cameras, analog-to-digital video transfer devices, digital video editing devices, digital video compressors (PHE before compression), digital video decompressors (PHE after decompression), digital video receivers, digital video

playback devices such as digital video disk, digital video tape, and hard-disk recording/playback devices, and digital video display devices.

In device 200, PHE 210 is inserted in the digital video stream at an appropriate point for the device. Although PHE 210 could be permanently enabled, it is preferable that a
5 MODE signal exist. The MODE signal serves at least as a means for enabling or bypassing PHE 210. Further, MODE can be used to select various modes of PHE operation, e.g., PHE-L, PHE-P, and/or PHE on one, the other, or both ends of the histogram, filtered, unfiltered, various different target histogram specifications, etc.

It is also possible to fix a threshold T for PHE 210. Preferably, however, an input T
10 provides a means for adjusting the threshold T . This input could be auto-selected from an examination of the input histogram. It could also be a manual input made available to the user.

For efficiency purposes, a brightness input B can also be implemented. Since PHE
210 already performs an intensity remapping, it is straightforward to have PHE 210
15 incorporate brightness remapping as well. For instance, T in the frame histogram can map to $T + B$ in the target histogram. This can be accomplished via a simple modification to the target histogram operations already presented for target histogram calculator 70:

```
for (i = 0; i < T; i++)  
    SumHist += Hist[i];  
20 SumHist /= T + B;  
for (i = 0; i < T + B; i++)  
    Target[i] = SumHist;  
25 for ( j = i + B; (i <= MaxLevel)&&(j <= MaxLevel); )  
    Target[i++] = Hist[j++];
```

The above algorithm does not check for a negative or zero value of $T + B$, but if such
is a possibility, it can be addressed by mapping all bins greater than $-B$ to bin 0 in the target
30 histogram.

It is also recognized that various components of PHE block could be implemented elsewhere, either in device 210 or in another device. For instance, calculation of a frame histogram requires a large percentage of the clock cycles required to implement PHE, but the frame histogram itself is relatively small. Thus a capture or recording device could pre-
5 calculate such a histogram and store/transmit it along with (or a frame ahead of) the actual frame data. Such an approach could reduce or eliminate any need for PHE frame buffering, and would greatly simplify receiver complexity in a single capture device/multiple playback device scenario. Likewise, a remapping LUT could be calculated in one device and transmitted to a downstream device for actual LUT transformation—such an approach could
10 be beneficial if an intermediate compression step is more efficient with non-contrast enhanced frame data, but it is not desirable to implement PHE at the downstream device. The frame buffer may not be necessary in any circumstance, if it is determined that a short (e.g. 1-frame) lag in adaptive contrast enhancement does not cause visible artifacts.

The above embodiments have focused on monochromatic video. The embodiments
15 can be modified to work with other color spaces as well. For instance, the luminance component of a color video sequence can be used to calculate a contrast-enhancing LUT for that sequence.

One of ordinary skill in the art will recognize that the concepts taught herein can be tailored to a particular application in many other advantageous ways. In particular, those
20 skilled in the art will recognize that the illustrated embodiments are but one of many alternative implementations that will become apparent upon reading this disclosure. Such minor modifications are encompassed within the invention, and are intended to fall within the scope of the claims.

The preceding embodiments are exemplary. Although the specification may refer to
25 “an”, “one”, “another”, or “some” embodiment(s) in several locations, this does not

necessarily mean that each such reference is to the same embodiment(s), or that the feature only applies to a single embodiment.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2

WHAT IS CLAIMED IS:

1. A method of video contrast enhancement comprising:

setting a first pixel level threshold for an input video frame in a video sequence;

when a given input-video-frame pixel's level is below the pixel level threshold,

- 5 remapping that pixel according to an adaptive contrast-enhancing function; and

when the given input-video-frame pixel's level is above the pixel level threshold,

remapping that pixel according to a scene-stable mapping function.

2. The method of claim 1, wherein the adaptive contrast-enhancing function applies

10 instead when the given pixel's level is above the threshold, and the scene-stable function

applies instead when the given pixel's level is below the threshold.

3. The method of claim 1, further comprising:

setting a second pixel level threshold for an input video frame, the second

15 threshold higher than the first; and

when a given input-video-frame pixel's level is above the second pixel level
threshold, remapping that pixel to a new level according to a second adaptive contrast-
enhancing function.

- 20 4. The method of claim 1, wherein setting a first pixel level threshold comprises

setting a threshold that places a selected percentage of the input video frame's pixels below
the threshold.

5. The method of claim 4, wherein the threshold is estimated from pixel values

25 obtained from one or more previous input video frames.

6. The method of claim 1, wherein setting a first pixel level threshold comprises setting the threshold to a fixed level for at least the duration of a scene.

5 7. The method of claim 1, further comprising calculating the adaptive contrast-enhancing function to remap an input histogram for pixels below the pixel level threshold to a new histogram specification.

10 8. The method of claim 7, wherein the new histogram specification is a uniform distribution.

15 9. The method of claim 7, further comprising tabulating the input histogram from the pixels of the input video frame.

20 10. The method of claim 7, further comprising tabulating the input histogram from the pixels of one or more previous input video frames in the video sequence.

25 11. The method of claim 10, wherein tabulating the input histogram comprises maintaining each bin of the input histogram by exponentially time-filtering a corresponding bin as calculated for sequential frame histograms, each frame histogram representing one frame in the video sequence.

12. The method of claim 7, wherein calculating the adaptive contrast-enhancing function is performed once for every input video frame.

13. The method of claim 7, wherein the adaptive contrast-enhancing function has a pixel level output range different than the range of input pixel levels below the pixel level threshold.

14. The method of claim 1, wherein remapping for pixels both below and above the first pixel level threshold comprises using a pixel's level as an index to read a value from a common lookup table that combines the adaptive contrast-enhancing function and the scene-stable remapping function.

15. The method of claim 1, further comprising detecting substantial changes in scene histogram content from one frame of the video sequence to a following frame.

16. The method of claim 15, further comprising, when a substantial change in scene histogram content is detected, allowing the adaptive contrast-enhancing function to change more rapidly than it is otherwise allowed to change.

17. The method of claim 15, further comprising, when a substantial change in scene content is detected, allowing the scene-stable remapping function to change substantially.

18. The method of claim 1, wherein the scene-stable mapping function remaps a pixel to an output level that is a linear function of that pixel's input level.

19. An apparatus comprising a computer-readable medium containing computer instructions that, when executed, cause a processor or multiple communicating processors to perform a method for video contrast enhancement comprising:

setting a first pixel level threshold for an input video frame in a video sequence;
when a given input-video-frame pixel's level is below the pixel level threshold,
remapping that pixel according to an adaptive contrast-enhancing function; and
when the given input-video-frame pixel's level is above the pixel level threshold,
5 remapping that pixel according to a scene-stable mapping function.

20. The apparatus of claim 19, the method further comprising calculating the adaptive
contrast-enhancing function to remap an input histogram for pixels below the pixel level
threshold to a new histogram specification.

21. A video contrast enhancer comprising:

a contrast-enhancing function generator capable of accepting a target histogram
specification and a set of histogram bins derived from one or more frames of a video
sequence, the bins representing a histogram at least for pixel levels below a selected pixel
level threshold, the function generator capable of generating a remapping function for input
5 pixel levels below the threshold based on the target histogram specification and the set of
histogram bins; and

a scene-stable mapper to control the remapping function for input pixel levels
above the threshold.

22. The video contrast enhancer of claim 21, further comprising a pixel remapper
capable of accepting a pixel level from an input video frame and outputting a corresponding
remapped pixel level according to the remapping function.

23. The video contrast enhancer of claim 22, wherein the pixel remapper comprises a

lookup table indexed by input pixel level, the lookup table supplying the remapped pixel level according to the remapping function.

24. The video contrast enhancer of claim 21, further comprising a histogram
calculator capable of constructing a frame histogram for the input video frame.

25. The video contrast enhancer of claim 24, wherein the bins of the frame histogram are supplied to the contrast-enhancing function generator as the set of histogram bins.

26. The video contrast enhancer of claim 24, further comprising a temporal histogram filter to supply the set of histogram bins for use by the contrast-enhancing function generator, each bin comprising an exponentially time-filtered combination of sequential frame histograms from the histogram calculator.

27. The video contrast enhancer of claim 26, further comprising a scene change detector capable of detecting scene changes based on a comparison of successive frame histograms from the histogram calculator and supplying a scene change signal when a scene change is detected in the video sequence, the temporal histogram filter applying a different time constant when the scene change signal is asserted.

28. The video contrast enhancer of claim 21, further comprising a threshold calculator to calculate the set threshold to correspond to a selected percentage of the pixels represented in the histogram bins.

29. The video contrast enhancer of claim 21, wherein the scene-stable mapper

controls the remapping function to at least approximate a linear function of input pixel level.

30. The video contrast enhancer of claim 21, further comprising:

a histogram calculator capable of constructing a frame histogram for an input

5 video frame;

a frame buffer capable of buffering an input video frame until a remapping function can be calculated for that frame; and

a pixel remapper capable of accepting a pixel level from the buffered input video frame and outputting a corresponding remapped pixel level according to the remapping function.

31. The video contrast enhancer of claim 21, wherein the contrast-enhancing function generator is also capable of generating a remapping function for input pixel levels above a second selected pixel level threshold higher than the first threshold, based on the target histogram specification and the set of histogram bins, and wherein the scene-stable mapper controls the remapping function for input pixel levels between the two thresholds.

32. A digital video device comprising:

a partial-histogram contrast enhancer to accept a digital video frame sequence and

20 remap the pixel levels in each frame using a remapping that conforms a histogram derived from the frame sequence to a new histogram specification for pixel levels below a first pixel level threshold;

means for setting the first pixel level threshold; and

means for enabling the partial-histogram contrast enhancer.

25

33. The digital video device of claim 32, wherein the means for setting the first pixel
level threshold comprises a threshold selector from the group consisting of a control that
allows a user to set a threshold parameter, an auto-threshold selector that sets a threshold
parameter based on the histogram derived from the frame sequence, and combinations
5 thereof.

34. The digital video device of claim 32, wherein the type of the device is a type
selected from the group consisting of a digital video camera, an analog-to-digital video
transfer device, a digital video editing device, a digital video compressor, a digital video
decompressor, a digital video receiver, a digital video playback device, and a digital video
display device.

35. The digital video device of claim 35, wherein the histogram derived from the
frame sequence is supplied to the digital video device along with the digital video frame
sequence.


VIDEO CONTRAST ENHANCEMENT THROUGH PARTIAL HISTOGRAM EQUALIZATION

5

ABSTRACT OF THE DISCLOSURE

Methods and apparatus for video contrast enhancement are disclosed. A pixel level threshold is set for an input video frame in a video sequence. For pixel levels in the input video frame that are below the threshold, an adaptive contrast-enhancing function is applied. For other pixel levels, a scene-stable mapping function is applied.

This contrast enhancement method can improve the contrast in darker areas of a scene depicted in the video sequence, without destroying the intended light levels for a scene or causing temporal brightness fluctuations in the enhanced video sequence.

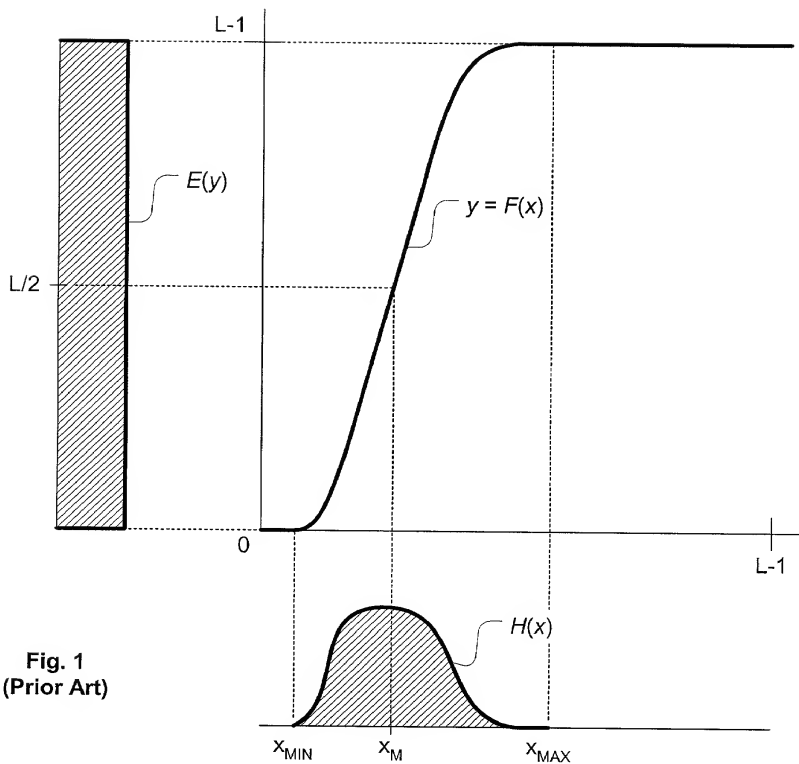

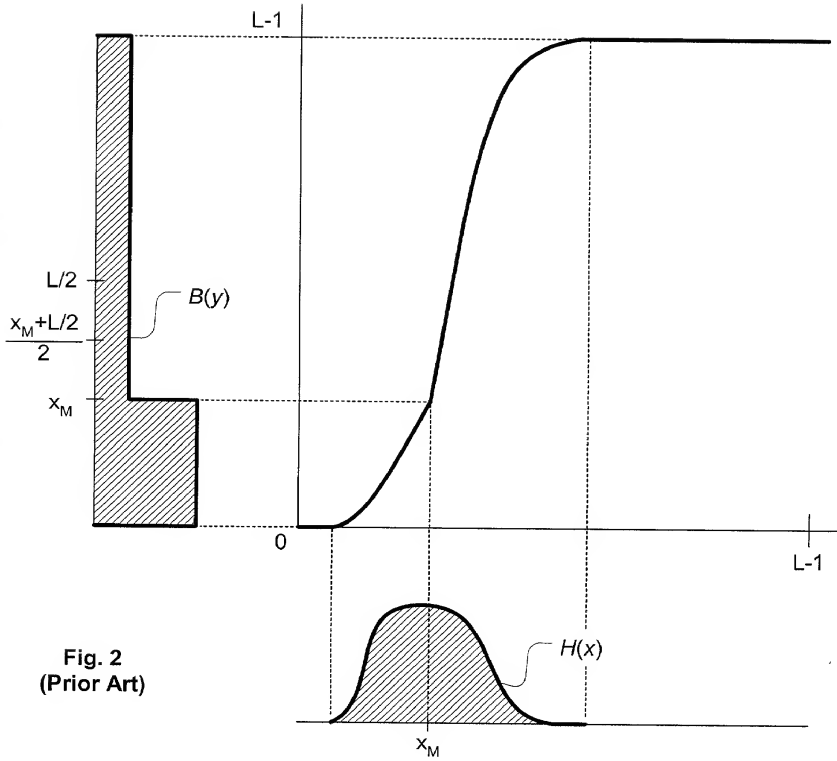
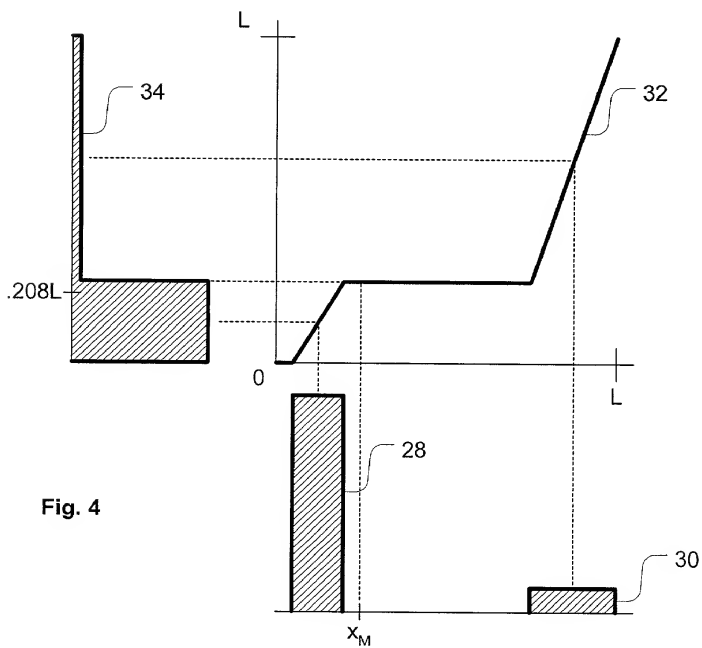
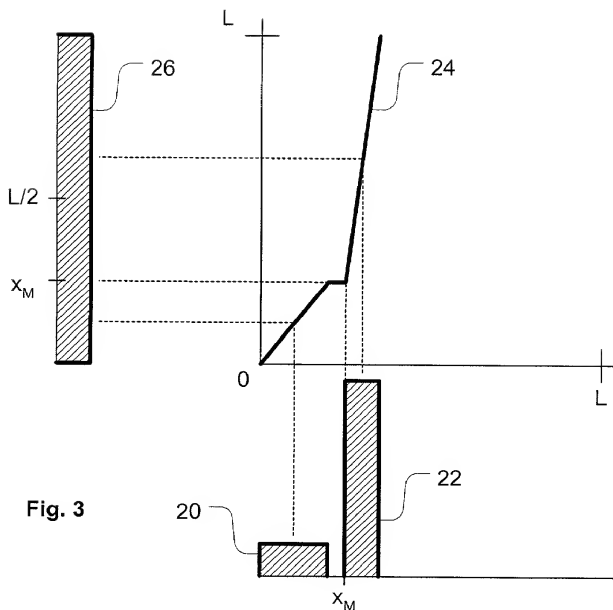


Fig. 2
(Prior Art)



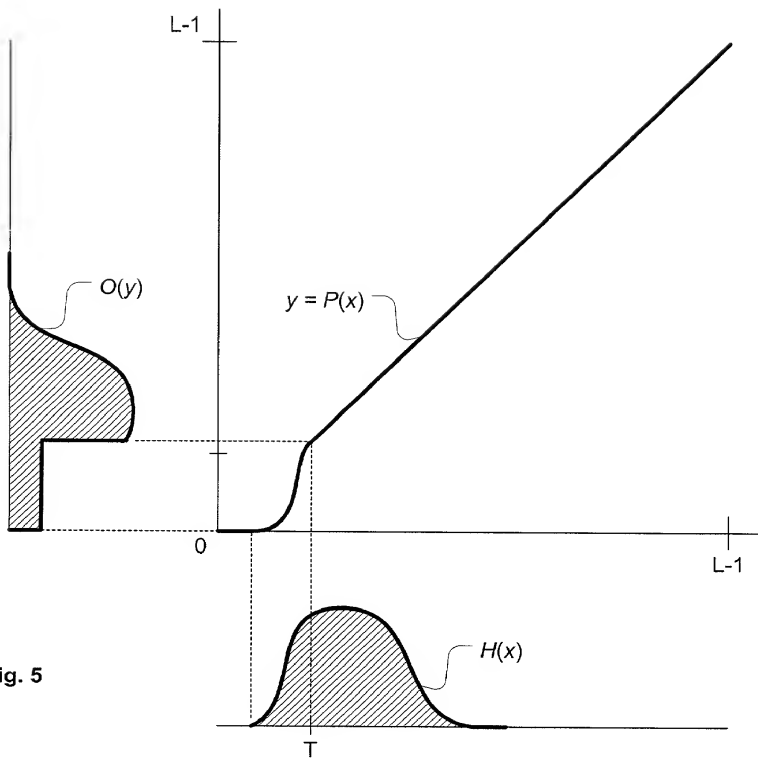


Fig. 5

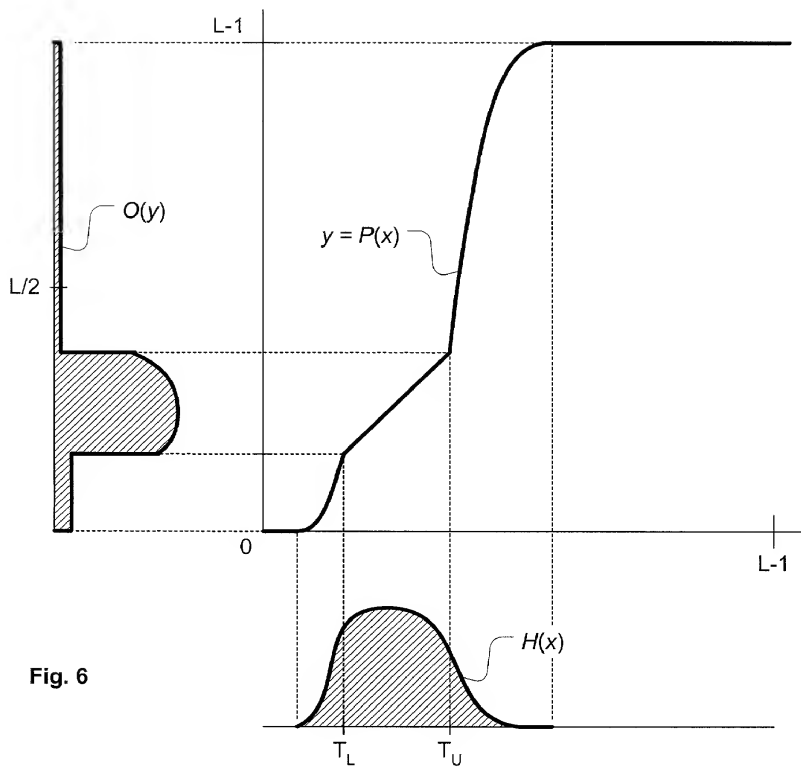
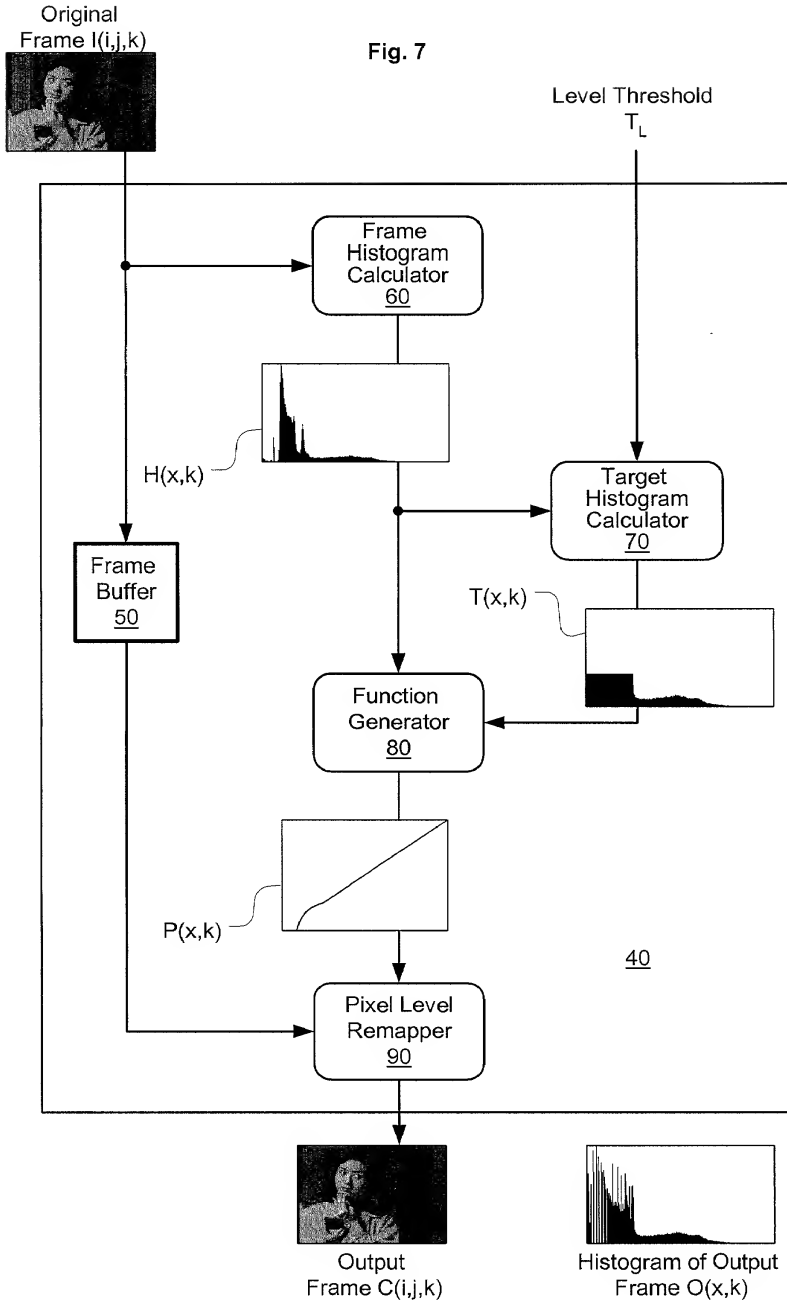


Fig. 6

Fig. 7





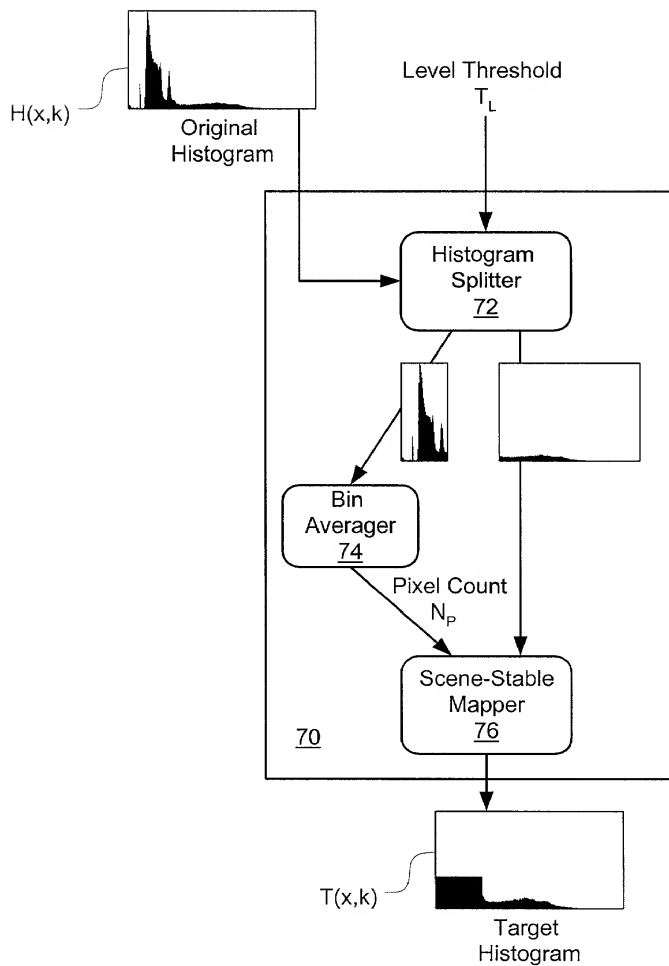


Fig. 8

Fig. 9

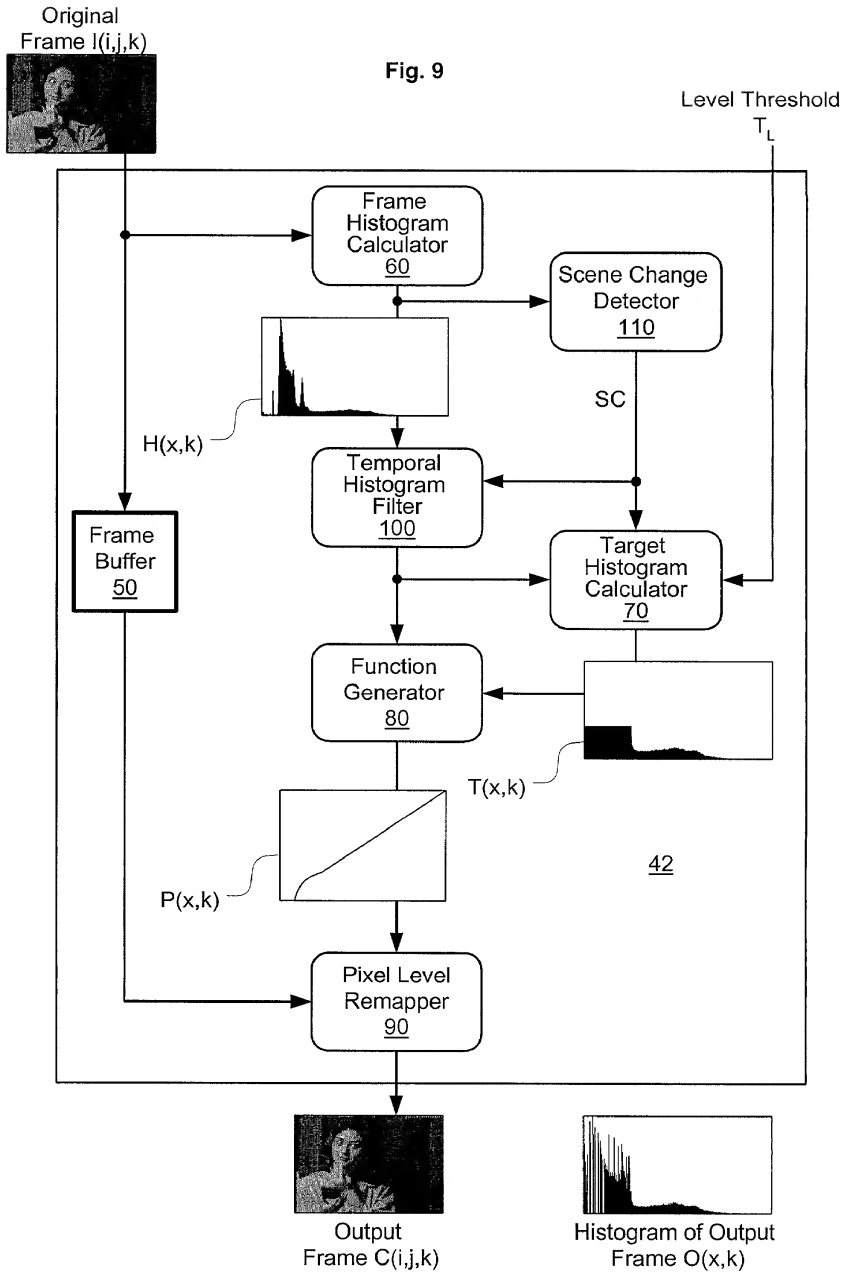

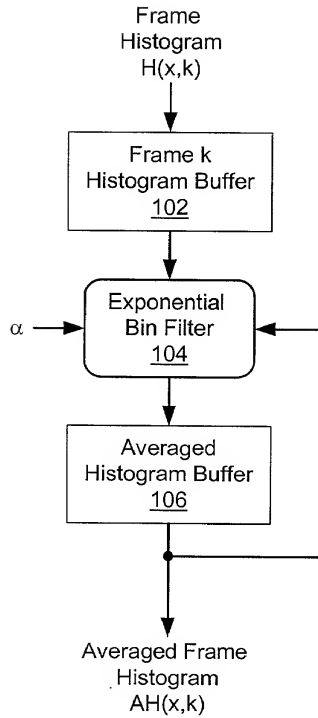

100

Fig. 10

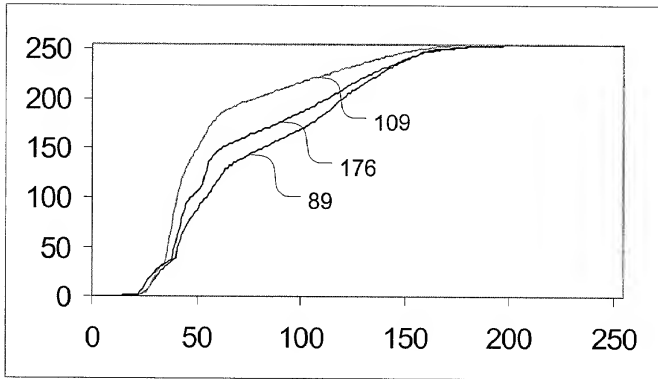


Fig. 11

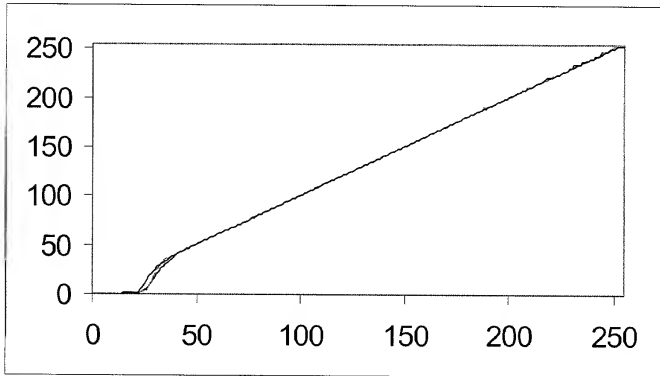


Fig. 12

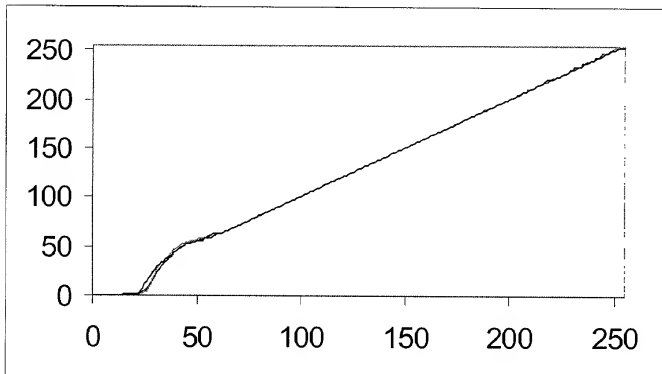


Fig. 13

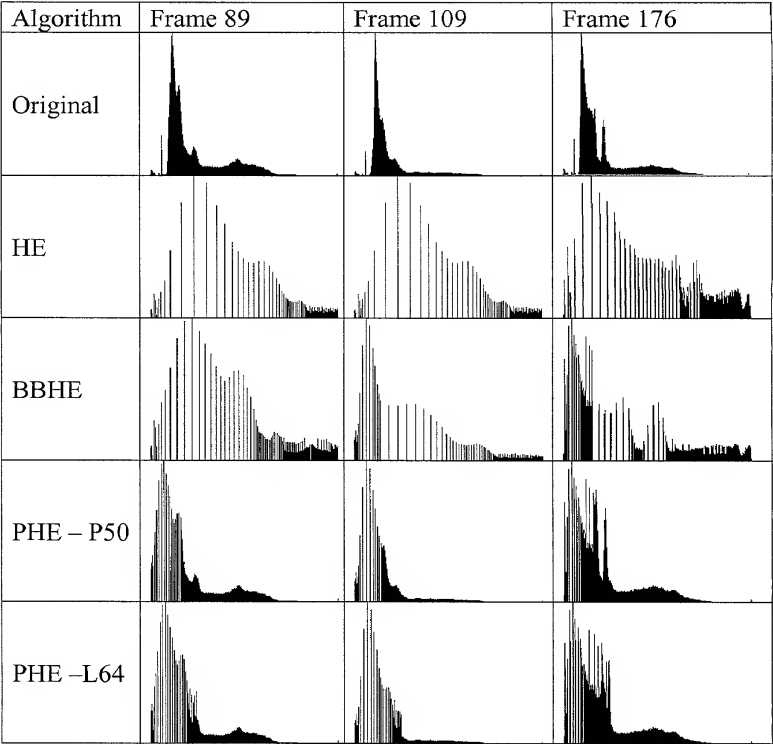


Fig. 14

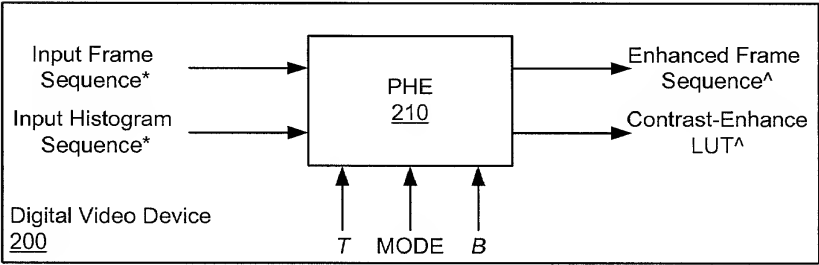


Fig. 15

*, ^ Each Implementation Has at Least One of These Two Options

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled VIDEO CONTRAST ENHANCEMENT THROUGH PARTIAL HISTOGRAM EQUALIZATION, the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Application No. _____
☐ and was amended on _____ (if applicable)
☐ with amendments through _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Claiming
Priority?

(Number)

(Country)

(Day/Month/Year Filed)

☐ ☐
Yes No

I hereby claim the benefit under Title 35, United States Code, Sec. 119(e) of any United States provisional application listed below:

Provisional Application No.

Filing Date

I hereby claim the benefit under Title 35, United States Code, Sec. 120 or §365(c) of any PCT international application designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>(Application No.)</u>	<u>(Filing Date)</u>	<u>(Status) (patented, pending, abandoned)</u>
--------------------------	----------------------	--

I hereby appoint the following attorneys to prosecute the application, to file a corresponding international application, to prosecute and transact all business in the Patent and Trademark Office connected therewith:

Customer No. 20575

<u>Attorney Name</u>	<u>Registration No.</u>
Jerome S. Marger	26,480
Alexander C. Johnson, Jr.	29,396
Alan T. McCollom	28,881
James G. Stewart	32,496
Glenn C. Brown	34,555
Stephen S. Ford	35,139
Julie L. Reed	35,349
Gregory T. Kavounas	37,862
Scott A. Schaffer	38,610
Joseph S. Makuch	39,286
James E. Harris	40,013
Graciela G. Cowger	42,444
Ariel Rogson	43,054
Craig R. Rogers	43,888

Direct all telephone calls to Stephen S. Ford at (503) 222-3613 and send all correspondence to:

MARGER JOHNSON & MCCOLLOM, P.C.
1030 S.W. Morrison Street
Portland, Oregon 97205

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole inventor: Louis Joseph Kerofsky

Inventor's signature: Louis J Kerofsky

9/26/00
(Date)

Residence: Portland, Oregon

Citizenship: United States

Post Office address: 1924 S.W. Mill Street Terrace
Portland, Oregon 97201